

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C.371**

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/GB00/02683

11 July 2000 (11.07.00)

17 July 1999 (17.07.99)

TITLE OF INVENTION

**STERILE OPHTHALMIC BARRIER DEVICE**

APPLICANT(S) FOR DO/EO/US

**Jonathan Quinton KERR**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C.371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). **(unexecuted) (3 Sheets);**
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98; **(2 sheets) with Form PTO-1449 (1 sheet);**
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included
13. ☒ A FIRST preliminary amendment **(4 sheets);**
  - ☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: **PCT International Published Application (WO 01/05299 A1) (with International Search Report attached) (20 sheets); The International Preliminary Examination Report (8 sheets); Check for \$510 based on small entity status; Certificate of First Class Mailing (1 sheet); and Return Postcard.**

FHW-099US

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

**CALCULATIONS** PTO USE ONLY

531 Rec'd PCT/PTO 17 JAN 2002  
(Atty. Docket No.: FHW-099US)

IN THE UNITED STATES PATENT DESIGNATED OFFICE (DO/US)  
(National Phase of International Appl.: PCT/GB00/02683,  
Publication No. WO 01/05299 A1)

In re the  
application of: **Jonathan Quinton KERR**  
International Application No.: **PCT/GB 00/02683**  
International Filing Date: **11 July 2000**  
U.S. Serial No.: **Not yet assigned**  
Filed: **Herewith**  
For: **STERILE OPHTHALMIC BARRIER DEVICE**  
Attorney Docket No.: **FHW-099US**

BOX PCT  
Commissioner for Patents  
Washington, D.C. 20231

**PRELIMINARY AMENDMENT**

Dear Sir:

Preliminary to examination of the above-referenced patent application, please  
amend the above-titled International patent application as follows:

**In the Claims:**

Please amend claims 1, 5, and 7 as follows:

1. (Twice Amended) A pack of barriers for use in relation to an eye contacting optical testing apparatus, comprising a first backing sheet on which are removably attached a plurality of barriers of substantially transparent film each having dimensions

comparable to those of the eye-contacting surface of a head of a probe of the optical testing apparatus, the surface of the substantially transparent material adjacent the first backing sheet being sterile and the alternative surface of the substantially transparent film being provided with a peelable adhesive, and a second backing sheet to which the plurality of barriers and the first backing sheet are adhered by the peelable adhesive.

5. (Twice Amended) A pack of barriers as claimed in claim 1 wherein the first backing sheet is provided with weakened lines to enable a portion of backing sheet surrounding one or more barriers to be removed by tearing of the backing sheet along the weakened lines.

7. (Twice Amended) A pack as claimed in claim 1 wherein each barrier is provided with one or more tabs for easy removal of the barrier.

**REMARKS**


Preliminary to examination of this application, Applicant amends claims 1, 5 and 7 to remove multiple dependencies, to provide proper antecedent basis, and to address other matters of form. The foregoing amendments are not related to issues of patentability, and introduce no new matter.

Entry of the foregoing Preliminary Amendment is respectfully in order and requested.

If there are any questions regarding the amendments to the application, we invite the Examiner to call Applicants' representative at the telephone number below.

Respectfully submitted,

LAHIVE & COCKFIELD, LLP

  
Anthony A. Lauretano  
Registration No. 38,220  
Attorney for Applicant

28 State Street  
Boston, MA 02109  
(617) 227-7400  
Date: **January 17, 2002**

10/031553

VERSION WITH MARKINGS TO SHOW CHANGES MADE

JC12 Rec'd PCT/PTO 17 JAN 2002

In the Claims:

Please amend claims 1, 5 and 7 as follows:

1. (Twice Amended) A pack of barriers for use in relation to an eye contacting optical testing apparatus, comprising a first backing sheet on which are removably attached a plurality of barriers of substantially transparent film each having dimensions comparable to those of the eye-contacting surface of ~~the~~ a head of a probe of the optical testing apparatus, the surface of the substantially transparent material adjacent the first backing sheet being sterile and the alternative surface of the substantially transparent film being provided with a peelable adhesive, and a second backing sheet to which the plurality of barriers and the first backing sheet are adhered by ~~means of~~ the peelable adhesive.

5. (Twice Amended) A pack of barriers as claimed in ~~any one of claims 1 to 4~~ claim 1 wherein the first backing sheet is provided with weakened lines to enable a portion of backing sheet surrounding one or more barriers to be removed by tearing of the backing sheet along the weakened lines.

7. (Twice Amended) A pack as claimed in ~~any preceding claim~~ claim 1 wherein each barrier is provided with one or more tabs for easy removal of the barrier.

STERILE OPHTHALMIC BARRIER DEVICE

This invention relates to ophthalmic apparatus used in the testing and diagnosis of various eyesight defects and eye disorders. In particular the invention relates to such apparatus which come into contact with the patient's eye and to improved prevention of transfer of infection between eyes tested using the apparatus.

The diagnosis of certain eye conditions often requires the oculist to measure certain properties of the eye. Often, the measurement of such properties is most accurately and simply achieved by the use of instruments which contact the cornea of the eye. The most common of these procedures is the Goldman Applanation Tonometry test which is used in the routine measurement of intraocular pressure. Other contact procedures include scan biometry for measuring the axial length of the eye prior to cataract surgery. Another example of a contact procedure is spectral endothelial microscopy which is used to assess the health of the corneal endothelial cells. Similar, but less common procedures include; transillumination, used to view the inside of the eye, pachometry used for measuring corneal thickness and gonioscopy used to examine anterior chamber of the eye.

It is known that various disease-causing microbes can be carried in the tears. Examples of diseases which may be transmitted through the tears include Herpes Simplex, Adenovirus, conjunctivitis, the HIV virus and prions such as that which may cause Creutzfeldt Jacob Disease (CJD). Thus there is an infection risk associated with the various contact procedures involving instruments touching the cornea of the eye.

Conventionally the apparatus used in the diagnosis of eye conditions is sterilised

by the use of a chemical sterilising agent (eg an alcohol such as surgical spirit) often provided in the form of a medi-swab or a surgical wipe. Such sterilising agents, if allowed to come into contact with the cornea of the eye, can cause chemical burns which, as the eye is anaesthetised during the test procedure, are often not detected until some time later. In order to prevent damage to the eye, the sterilising agent must either be allowed to evaporate, this can take up to three minutes for each application, or may be washed off with saline solution or alternatively wiped with a dry tissue. When the sterilising agent is allowed to evaporate, this considerably increases the time taken to perform a simple ophthalmic test. Consequently, the sterilising procedure is not always performed when transferring from one eye of a patient to the other and this may result in cross contamination between the eyes of a patient. When dry tissues or saline are used to remove the residual sterilising agent, there is a potential risk that the unsterile tissues and saline may themselves transfer a contaminant to the surface of the ophthalmic apparatus and into the eye of the patient.

A further disadvantage of the conventional sterilising techniques is that the chemical sterilising agents used often do not destroy certain microbial contaminants known to be carried in the tears. One example of such a microbe is the Adenovirus.

As an alternative, a number of sterile barriers have been developed to shield the eye from the surface of the ophthalmic apparatus. These barriers generally take the form of sterile, transparent plastic caps or sheaths which can be positioned over the contacting surface of the ophthalmic apparatus each time a new patient is examined. These barriers may be re-sterilised before re-use or may be discarded and replaced with fresh barriers.

Examples of cap-type barriers are described in US Patents 4 922 914, 5 282 470 and 5 031 622. An example of a sheath-type barrier is described in US patent 5 002 057. Whilst these prior art devices no doubt provide protection against the transmission of



disease-causing microbes between patients, they are relatively costly to manufacture and cumbersome to package in bulk. Practitioners in eye units may see dozens of patients in a week and may find these bulky and costly barriers unattractive or not cost effective as a disposable option.

It is an object of the present invention to provide a simple, low cost solution to the problems associated with conventional methods of sterilising ophthalmic apparatus.

In accordance with the present invention there is provided a barrier for use in relation to an eye contacting optical testing apparatus, the apparatus having a probe for contacting the eye, the barrier comprising a layer of substantially transparent material having dimensions comparable to the surface of the head of the probe and being removably fixable to the probe by means which do not affect the transparency of the material layer and the layer being sterile on at least one of its surfaces.

The material may be any transparent material which is relatively inert in a saline or aqueous environment. Preferred materials include polymers such as polyethylene.

Various fixing means may be used to releasably fix the barrier to the probe of the optical apparatus. For example a peelable or pressure sensitive adhesive may be applied to one surface of the barrier, or alternatively to tabs which affix to the side rather than the head of the probe. Preferably, an adhesive is water-based, optionally it comprises a hydrogel. Alternatively a suitable material may be chosen such that it will cling by means of static or surface tension to the head of the probe.

The barrier may conveniently be provided in the form of a laminate comprising a central layer of optically transparent material having applied to one surface a layer of adhesive material and optionally, a layer of sterilising agent applied to the other. The

transparent material may, of course, be sterilised by other means and the barrier provided with just the transparent and adhesive layer.

Suitable barrier materials and adhesives can be found from the prior art in the field of biomedical engineering. Some examples of suitable barrier materials include, but are not limited to; polyesters, polycarbonates, polyamides, ethylene vinyl acetate copolymer, polyvinyl chloride and its copolymers, polysulphones, cellulose acetate and other cellulose derivatives. Examples of suitable adhesives include but are not limited to; rubber-based adhesives, acrylic adhesives and modified acrylic adhesives, silicone based adhesives and hydrogel and hydrocolloid adhesives.

Preferably, the perimeter of the barrier will in at least one radial direction, extend beyond that of the head of the probe. This provides tabs which can be wrapped over the edge of the probe head where tears may accumulate when a patient blinks during examination, thereby further reducing the risk of cross-infection. Various geometric arrangements can be envisaged to provide these wrap-over tabs on a barrier adapted to fit a typically round probe head of an optical apparatus. Some examples of suitable geometries include a tear drop shape, a square with sides approximately equal to the diameter of the probe head wherein the corners of the square can be used to remove the barrier, or a triangle whose apexes can be wrapped over the edges of the probe.

In another option the barrier may be substantially circular in shape with one or more protruding square or rectangular tabs about its circumference. Other suitable geometries include; a flower shaped design consisting of a circular area which is approximately the same diameter as the probe head with a plurality of arcuate or conical petals which can be folded over the side or collar of the probe head. Preferably the tabs will adhere to the edges of the probe head.

Optionally the tabs may be in part non-adherent to the probe head and can be used to aid removal of the barrier after use. For example, in the case of the flower shaped design, one of the petals may extend further than the others to provide a tag which will be non-adhesive for easy removal of the barrier after use. Alternatively one or more of the petals may be non-adhesive, there being sufficient adherent petals remaining to cover substantially all of the head and collar of the probe.

Preferably, the tabs of a barrier extend to cover at least about 5mm of the side/collar of the probe head.

In an alternative form, the barrier may be manufactured from a material having slightly elastic properties. The barrier is then supplied as a flat sheet but can be stretched over the end of the probe head and released to grip the edges the probe head.

In order to facilitate easy location of the barrier on the probe head one or more coloured markers or indicators may be provided to define the edge of the barrier or the edge of the probe head on which it is to be placed.

Optionally this marker or indicator may be provided in the form of a coloured ring which is provided to be of a size coincident with the outer perimeter of the probe head. In this case the barrier can be located on the probe head simply by aligning the coloured ring with the perimeter of the probe head. In addition to providing a simple means of locating the barrier on the probe head, the colour indicator may also provide an indication as to which surface of the barrier is sterile where only one surface is sterile. It should be understood that a series of two or more displaced dots, lines or arcs may equally be used to define the area of the probe head.

It will be understood from the preceding description of the barrier of the present invention that such a barrier can be provided relatively inexpensively. Whilst it may be

possible to re-sterilise the barrier, it is preferred that the barrier is provided in packs of sheets comprising a multitude of such barriers and that the barriers are used only for a single application and are then disposed of.

In another aspect the invention provides a sheet comprising a number of pieces of substantially transparent material the pieces having dimensions substantially similar to those of the probe head of an eye contacting optical apparatus, the material being sterile on at least the surface which will contact the eye.

The sheet can conveniently be manufactured using a roll-to-roll coating process where the adhesive and/or sterile layer is applied to the barrier material in a sheet-like form. Individual barriers can then be cut or pressed from the resulting laminate. Backing sheets may be added before or after the individual barriers are cut from the sheet.

Preferably the sheet is provided with a backing sheet from which it is peelable. Optionally one surface may be provided with a peelable adhesive, which may also be provided with a backing sheet.

Thus it can be seen that a multitude of disposable ophthalmic barriers according to the present invention can be provided in the convenient form of a sheet provided between two backing sheets. By peeling away one backing sheet the user can reveal the adhesive surface of a barrier, and can position this on the probe head. Once the barrier is located on the probe head, the second backing sheet or a portion thereof can be peeled away revealing the sterile surface. Thus, the sterility of the sterile surface of the barrier is maintained until the barrier contacts the eye under test. The provision of tabs or protrusions as previously described, allows for quick and simple removal of a barrier such that a fresh barrier can be applied before the second eye of the patient or a subsequent patient is tested.

Optionally, the backing sheet adjacent the sterile surface of the barrier may be provided with a coloured marker indicating the outer perimeter of the barrier or of the probe head. This can be provided as an alternative or in addition to the markers previously described in association with the barrier itself. Again, the marker is used by the oculist to align the barrier with the perimeter of the probe head. Preferably the coloured marker is provided in the form of a coloured ring designed to be coincident with the outer perimeter of the probe head. Optionally the non-sterile surface of the sheet of barriers may be provided without an adhesive in such a case an adhesive may be applied separately. Alternatively, an adhesive surface may be provided, in a form whereby its adhesive property is dependant on the provision of a separate ingredient such as water. An example of such an adhesive may be found on the conventional postage stamp.

Optionally the sheet with its backing sheets may be provided with perforations by which the oculist can remove a strip comprising any pre-desired number of barriers. Optionally the perforations may be arranged to define individual barriers or pairs of barriers.

For the purposes of exemplification the invention may be further described with reference to the Figures in which:-

Figure 1 shows a first embodiment of a barrier according to the present invention;

Figure 2 shows the embodiment of Figure 1 located on a typical probe head of some optical apparatus;

Figure 3 shows a second embodiment of the invention;

Figure 4 shows three alternative embodiments of the invention;

Figure 5 shows a sheet of barriers according to the present invention;

Figure 6 shows a layout of some barriers according to the present invention with associated backing sheets; and

Figure 7 shows another alternative embodiment of the present invention.

In Figure 1 a barrier 1 comprising a substantially circular piece of transparent material is provided with a coloured ring-shaped marker 2 of comparable size to the perimeter of a probe head 3 located on a probe 4 of a piece of optical apparatus 5. The ring 2 is of comparable dimension to the perimeter of the probe head 3. The barrier 1 is also provided with a protruding tab 6 which can be used as a means of levering the barrier from the probe head once used.

Figure 2 shows the embodiment of Figure 1 arranged on the probe head. As can be seen from the Figure the coloured ring 2 is positioned coincident with the perimeter of the probe head 3. The protruding tab 6 does not communicate with the surface of the probe head 3 and thus can be easily held and pulled to remove the barrier once used. In the embodiments of Figure 1 or 2 the surface of the barrier adjacent the probe is provided with some form of adhering means.

In Figure 3 an alternative embodiment of the barrier 1 is provided with two protruding tabs 6 on which is provided a patch of adhesive material 7. Once the barrier is located on the probe head by means of colour marking 2, the adhesive tabs 6 are fixed against the sides of the probe 4 to hold the barrier into position.

Figure 4 shows some alternative shapes for the barrier. Figure 4a shows a teardrop-shaped barrier of which the apex 8 features as a convenient tab to aid removal of

the barrier following use. Similarly Figure 4b shows a square shaped barrier of which the corners 9 can be used to provide a tab to aid removal of the barrier following use again similarly in Figure 4c a triangular barrier is provided of which the apexes 10 provide a convenient tab means to aid removal.

Figure 5 shows a backing sheet 11 on which are arranged a multitude of barriers according to the invention 1 the sheet 11 is perforated by perforation lines 12 to enable the user to tear off strips or individual barriers to facilitate easier location of an individual barrier.

Figure 6 shows the layout of another alternative embodiment according to the present invention. In Figure 6 a backing sheet 11 is provided with a multitude of coloured rings 2 having dimensions comparable to the perimeter of a typical probe head 3 of an optical apparatus 5. A multitude of barriers 1 having sterile surfaces 14 and surfaces provided with peelable adhesive 13 are arranged on backing sheet 11 in positions coincident with the colour marker rings 2. A second backing sheet 15 is provided to protect the peelable adhesive surface.

Figure 7 shows another alternative embodiment of the invention. A barrier 1 according to the present invention is provided with a collar 16 the collar being of such a size as to provide a friction fit with the walls of the probe 4 which carry probe head 3 of optical apparatus 5. It will be understood that it is not essential for collar 16 to have a friction fit if the barrier is provided with some form of gripping collar (not shown) to hold the collar 16 in position on the head of the probe 4.

The embodiments described in Figure 1 to 7 are just some alternative examples of the invention and are not intended to be limiting.

The skilled reader will understand that in order to maintain accuracy of the optical instruments, the surface of the barrier placed over the probe head should be parallel to and in very close communication with the optical surface of the probe head.

The barriers of the present invention hereinbefore described may be used with any optical device having a probe head designed to make contact with the eye. Examples of such optical devices include, but are not limited to; Goldman tonometer heads, Gonioscope lenses, 3-mirror Goldman and other diagnostic contact lenses, A-scan ultrasound probes, YAG laser lenses, retinal laser lenses, vitrectomy lenses, ultrasound pachometry apparatus, trans-illumination apparatus and dynamometers.



**CLAIMS**

1. A pack of barriers for use in relation to an eye contacting optical testing apparatus comprising a first backing sheet on which are removably attached a plurality of barriers of substantially transparent film each having dimensions comparable to those of the eye-contacting surface of the head of a probe of the optical testing apparatus, the surface of the substantially transparent material adjacent the first backing sheet being sterile and the alternative surface of the substantially transparent film being provided with a peelable adhesive, and a second backing sheet to which the plurality of barriers and the first backing sheet are adhered by means of the peelable adhesive.
2. A pack of barriers as claimed in claim 1 wherein the first backing sheet is provided with locating means for locating the head of the probe of the optical apparatus.
3. A pack of barriers as claimed in claim 2 wherein the locating means comprises coloured markers.
4. A pack of barriers as claimed in claim 3 wherein the locating means comprises a series of coloured rings having a perimeter substantially coincident with that of the head of the probe of the optical apparatus.
5. A pack of barriers as claimed in any one of claims 1 to 4 wherein the first backing sheet is provided with weakened lines to enable a portion of backing sheet surrounding one or more barriers to be removed by tearing of the backing sheet along the weakened lines.
6. A pack as claimed in claim 5 wherein the weakened lines are provided in the form of perforations.
7. A pack as claimed in any preceding claim wherein each barrier is provided with one

ART 34 AMDT

12

or more tabs for easy removal of the barrier.

8. A pack as claimed in claim 7 wherein the tabs are provided with an adhesive substance for retaining the barrier onto the head of the probe.
9. A sheet of barriers for use in relation to an eye contacting optical apparatus comprising a plurality of pieces of substantially transparent material removably attached to a backing sheet, the pieces having dimensions substantially similar to those of the probe head of the eye contacting optical apparatus, having at least one sterile surface being in contact with the backing sheet, whereby the backing sheet may be removed from each piece to reveal the sterile surface.
10. A sheet of barriers as claimed in claim 9 wherein the surface of each piece of substantially transparent material opposing the at least one sterile surface is provided with a peelable adhesive.

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number  
WO 01/05299 A1(51) International Patent Classification: A61B 1/00,  
3/125, 3/10, 3/16

(21) International Application Number: PCT/GB00/02683

(22) International Filing Date: 11 July 2000 (11.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
9916743.9 17 July 1999 (17.07.1999) GB

(71) Applicant and


(72) Inventor: KERR, Jonathan, Quinton [GB/GB]; Bull-  
beggars, Godstone, Surrey RH9 8BJ (GB).(74) Agents: MADDISON, Victoria, Jayne et al.; Fry Heath  
& Spence, The Old College, 53 High Street, Horley, Surrey  
RH6 7BN (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,  
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,  
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,  
TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

## Published:

— With international search report.

— Before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments.For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: STERILE OPHTHALMIC BARRIER DEVICE

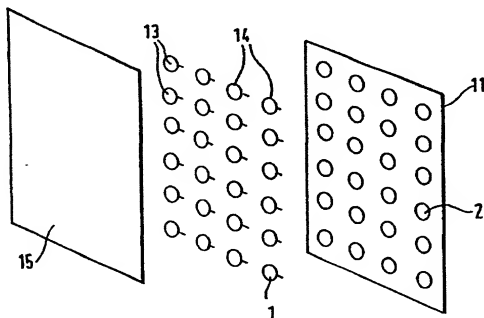

(57) Abstract: A barrier for use in relation to an eye contacting testing apparatus of the sort having a probe for contacting the eye, comprises a layer of substantially transparent material having dimensions comparable to the surface of the head of the probe and is removably fixable to the probe by means, such as a peelable adhesive, which do not affect the transparency of the material layer. The layer is sterile on the surface which contacts the eye in place of the probe head. Such barriers are disposable and quick and easy to position and replace. Barriers according to the invention can be conveniently provided in sheets comprising multiples of barriers.

WO 01/05299 A1

1 / 3

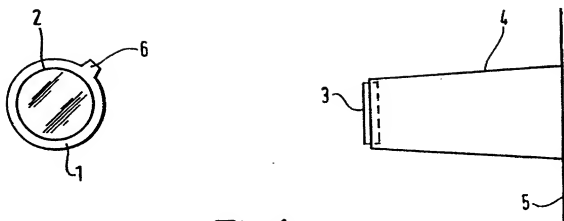


Fig.1.




Fig.2.

2/3

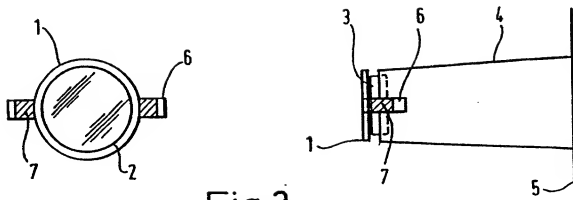


Fig.3.



Fig.4a.




Fig.4b.




Fig.4c.

3/3

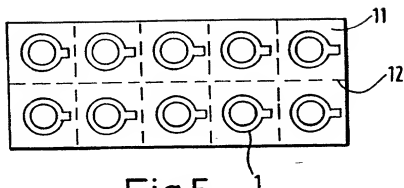


Fig. 5.

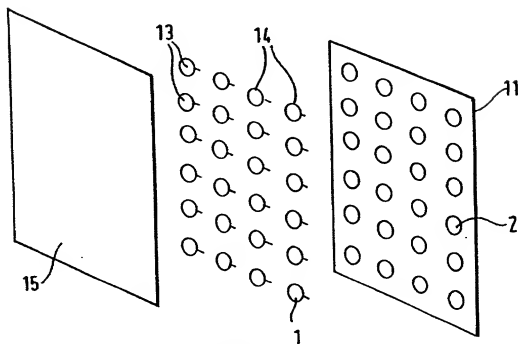


Fig. 6.

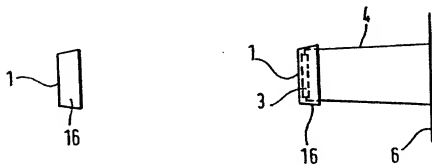


Fig. 7.

**DECLARATION, PETITION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**

(Check one):

- ☐ Declaration Submitted with Initial Filing  
☒ Declaration Submitted after Initial Filing

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**STERILE OPHTHALMIC BARRIER DEVICE**

the specification of which (check one):

☐ is attached hereto.

OR

☒ was filed on **11 July 2000** as PCT International Application Number **PCT/GB00/02683** and filed as **U.S. Serial No. 10/031538** ✓

☐ and was amended by PCT Article 19 Amendment on \_\_\_\_\_  
(if applicable),

☐ and was amended by PCT Article 34 Amendment on \_\_\_\_\_  
(if applicable).

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

## PRIORITY CLAIM

(Check one):

- ☐ no such applications have been filed.
- ☒ such applications have been filed as follows

**1) FOREIGN PRIORITY CLAIM:** I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (dd,mm,yyyy)	Priority Not Claimed	Certified Copy Attached	
				Yes	No
9916743.9 ✓	GB ✓	17 July 1999 (17.07.1999)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- ☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

**2) PROVISIONAL PRIORITY CLAIM:** I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

Provisional Application Number(s)	Filing Date (dd/mm/yyyy)

- ☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

**3) U.S./PCT PRIORITY CLAIM:** I hereby claim the benefit under Title 35, United States Code, §120 of any United States application or §365(e) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (dd/mm/yyyy)	Parent Patent Number (if applicable)

- ☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto.



## POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

James E. Cockfield Reg. No. 19,162  
 Thomas V. Smurzynski Reg. No. 24,798  
 Ralph A. Loren Reg. No. 29,325  
 Giulio A. DeConti, Jr. Reg. No. 31,503  
 Ann Lamport Hammitte Reg. No. 34,858  
 Elizabeth A. Hanley Reg. No. 33,505  
 Amy E. Mandragouras Reg. No. 36,207  
 Anthony A. Laurentano Reg. No. 38,220  
 Kevin J. Canning Reg. No. 35,470  
 Jane E. Remillard Reg. No. 38,872  
 DeAnn F. Smith Reg. No. 36,683  
 Peter C. Lauro Reg. No. 32,360  
 Jeanne M. DiGiorgio Reg. No. 41,710  
 Megan E. Williams Reg. No. 43,270

Jeremiah Lynch Reg. No. 17,425  
 David J. Rikkers Reg. No. 43,882  
 Maria C. Laccotripe Limited Recognition  
 Under 37 C.F.R. § 10.9(b)  
 Debra J. Milasincic Reg. No. 46,931  
 David R. Burns Reg. No. 46,590  
 Sean D. Detweiler Reg. No. 42,482  
 Cynthia L. Kanik Reg. No. 37,320  
 Theodore R. West Reg. No. 47,202  
 Shayne Y. Huff Reg. No. 44,784  
 Hathaway P. Russell Reg. No. 46,488  
 Daniel B. Ko Reg. No. 47,332  
 John S. Curran Reg. No. P50,445

of LAHIVE & COCKFIELD, LLP, 28 State Street, 24<sup>th</sup> Floor, Boston, Massachusetts 02109, United States of America.

Send Correspondence to:

Anthony A. Laurentano, Lahive & Cockfield, LLP, 28 State Street, Boston, Massachusetts 02109, United States of America

Direct Telephone Calls to: (name and telephone number)

Anthony A. Laurentano, (617) 227-7400

Wherefore I petition that letters patent be granted to me for the invention or discovery described and claimed in the attached specification and claims, and hereby subscribe my name to said specification and claims and to the foregoing declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00

Full name of sole or first inventor <b>Jonathan Quinton KERR</b>	
Inventor's signature <i>Jonathan Kerr</i>	Date 16/3/02
Residence <b>Bullbeggars, Godstone, Surrey RH9 8BJ Great Britain GBX.</b>	
Citizenship <b>Great Britain</b>	
Post Office Address (if different)	